INSTALLATION INSTRUCTIONS

Model # 8698/8798

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to misplace any small parts necessary for installation.
3. Unscrew the finial (I) with the rubber washer (J), take apart the back plate (H) apart from the cage (K).
4. Carefully install the glass sheets (A,B &C) into cage (K). Secure the glass at the top with long studs (L) and screws (M). Secure them at the bottom with short studs (N) and screws (O).
5. Thread the two studs (B) into the pre-drilled holes in the circular strap (C) spaced the same distance apart as the holes in the back plate (H), and secure with the nut (E).
6. Attach the circular strap (C) using outlet box screws (F) to the outlet box (A), (Fig 1).

Fig. 1

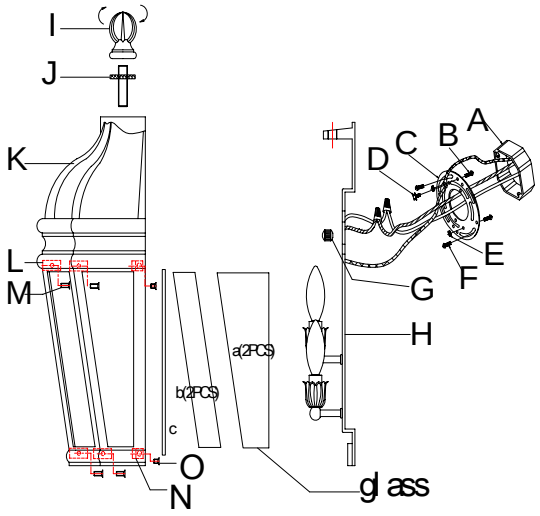

CONNECTING THE WIRES (Fig.2)

7. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw (D) provided.

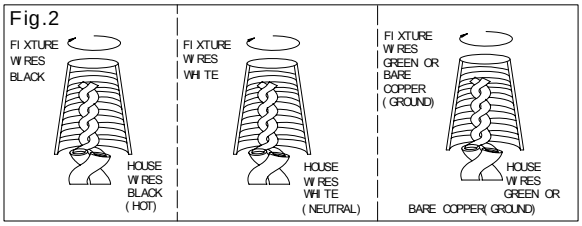

FINISHING THE INSTALLATION

8. Align the back plate (H) to studs (B) and secure with cap nuts (G). (Fig 1)
9. At this point, install the light bulbs in accordance with the fixture specification **–DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
10. To prevent moisture from entering the outlet box (A) and causing a short, use clear silicone Sealant to outline the outside of fixture back plate (H) where it meets the wall leaving a space at bottom to allow moisture a means to escape.
11. Replace the cage (K) and secure with rubber washer (J) and finial (I).

Your installation is now complete. Return power to the outlet box and test the fixture.

"CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR"

Intertek

american lighting association